




Typ: **R 160 G.2BK**

Stahlgehäuse

Art.-Nr.: F02-16002



Kennlinien

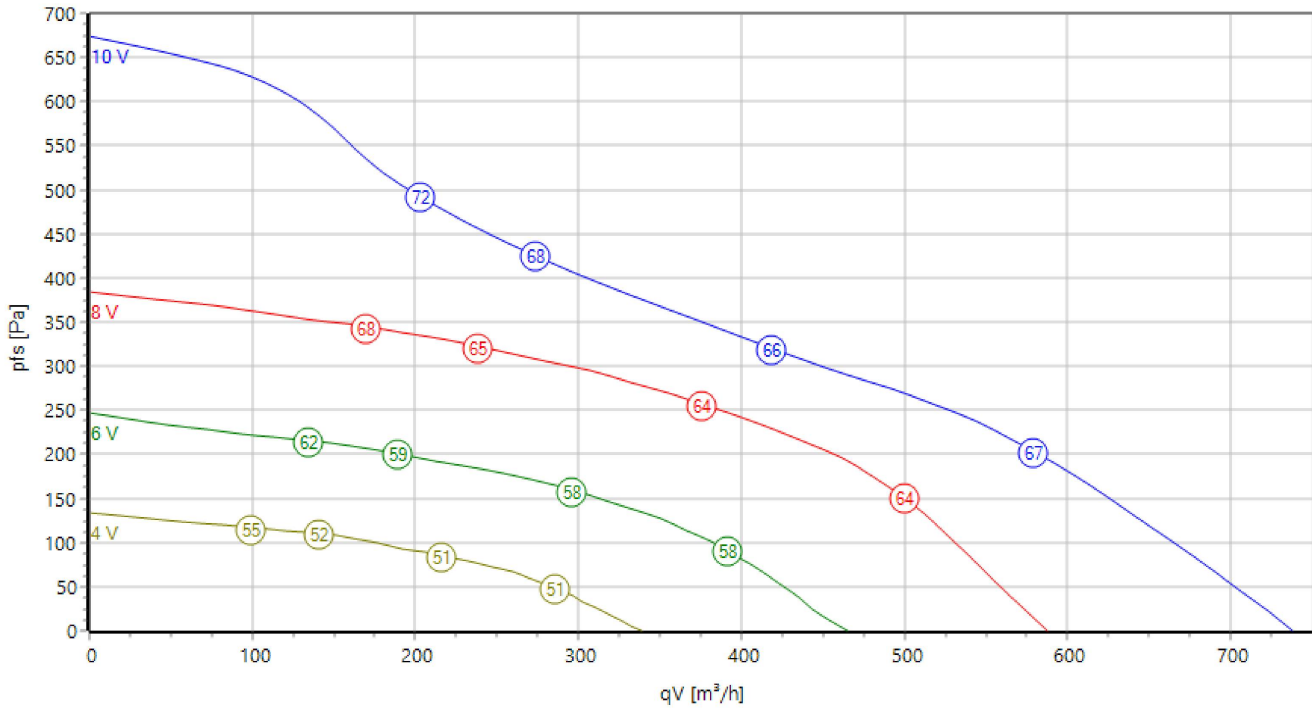

Nennwerten

U [V]	f [Hz]	Daten @ D _N	P _{ed} [kW]	I _N [A]	n _N [U/min]	t _R [°C]	k ₁₀ [m²/s/h]	I _A / I _N	IP	m [kg]
1~200-240	50/60	230	0,089	0,75	3260	-20 .. +60	-	-	IP 54	3,2

ErP - Daten

Typ	qv [m³/h]	p _{fs}	N	η _{fs} [%]	P _{ed}	n [U/min]	v [m/s]
Lot6(EU) Nr. 1253/2014	457	295	58	42,6	0,0881	3262	6,316

Schalleistung

Frequenz	Σ	63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz
Lw(D,in) [dB]	1	-43	-24	-10	-8	-6	-6	-7	-14
Lw(D,out) [dB]	-	-38	-20	-9	-9	-7	-5	-7	-17
Lw(D,cas) [dB]	-18	-24	-9	-7	-8	-6	-7	-13	-20



Typ: **R 160 G.2BK**

Stahlgehäuse

Art.-Nr.: F02-16002

